

PPS1110

High Pressure Calibrator



- **Pressure range: 0 to 700 bar**
- **Accuracy: $\pm 0,1$ % of the full pressure range**
- **Measurement interval: 0,5 seconds**
- **Medium: Oil**
- **CE compliant / RoHS compliant**

Application

Pressure calibrators are highly accurate calibration instruments which are available for the following pressure ranges: -0,85...10 bar, -0,85...25 bar or 0...700 bar (PPS1110) (special measurement ranges are available on request).

The high-pressure calibrator is used to generate pressure in order to check and calibrate mechanical and electronic pressure measurement devices with the help of comparative measurements.

The pressure generator is accommodated together with the pressure display in a functional housing. The pressure on a test object that is fitted to the calibrator can be built up quickly, and tracking is made easy thanks to the integrated display.

Test objects with a G 1/4" thread can be connected directly to the pressure port for the test object. The pressure is built up and adjusted precisely via a screw compressor that is integrated in the device (medium: hydraulic oil).

*By DAkkS accredited laboratory according to DIN EN ISO / IEC 17025: 2005
The accreditation is valid only for the in the accreditation scope listed quantities
(our Labory number is D-K-15055-01-00).*




Measurement work is made easier by a wide range of functions, such as setting any desired pressure zero point, display of peak and trough pressure values, or leak measurements.

Furthermore, the applied pressure can be displayed directly on a computer via the integrated interface (USB converter), after which it can be saved and processed or managed in any desired manner.

The calibrator, including accessories, is supplied in a durable carrying case, making it ideal for assignments in the field.

- Measurement accuracy: < 0,1% of the full pressure range
- Measurement interval: 0,5 seconds
- Pressure generation by means of hydraulic oil (EP-1201 or Olive oil)
- Battery-powered (normal commercially available button-cell battery)
- Battery lifetime: > 2000 h in continuous operation
- USB interface converter: included in the scope of delivery
- Ambient characteristics: 0...50 °C / 5...95% relative air humidity
- CE compliant / RoHS compliant

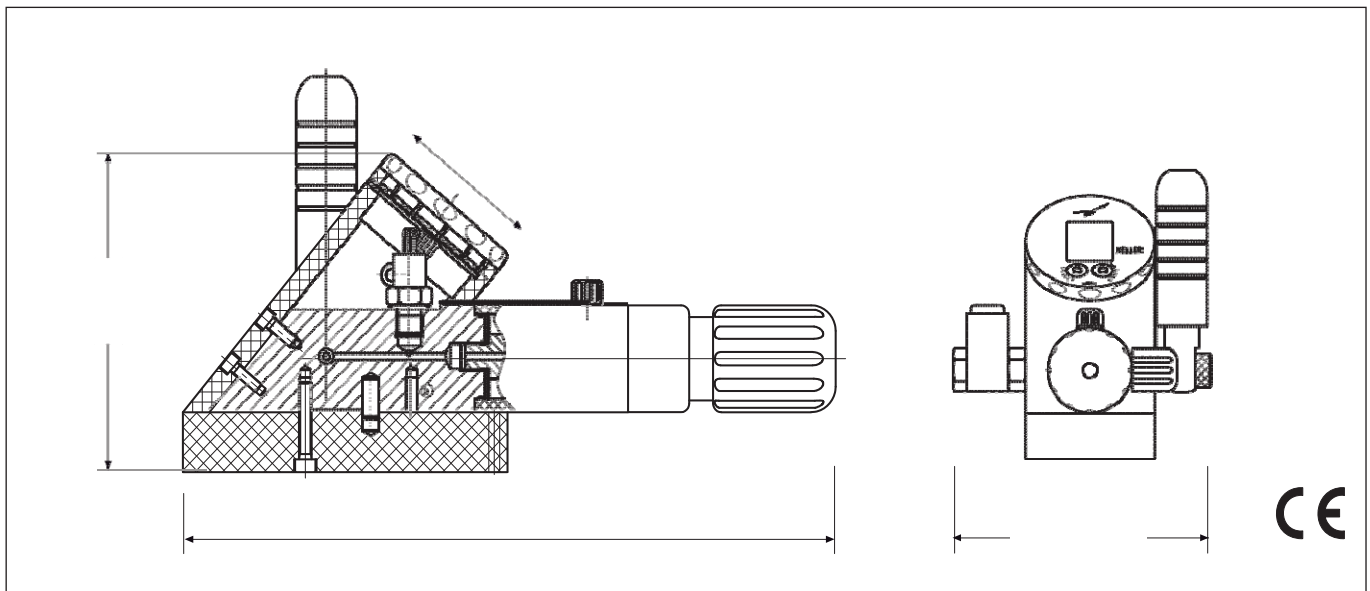

Specification

Pressure range (FS)	0...700 bar (others on request)
Resolution	50 mbar
Overpressure	840 bar
Accuracy, error band ⁽¹⁾ (10...40 °C)	< 0,1% FS
Accuracy, error band ⁽¹⁾ (0...50 °C)	< 0,1% FS
Measurement interval	0,5 seconds

(1) including accuracy, temperature coefficients, zero point and range tolerance

Electrical characteristics

Power supply	3 V battery, type CR2430
Batterie-Lebensdauer	> 2000 h in continuous operation








Ambient characteristics

Operating temperature	0...50 °C
Compensated range	0...50 °C
Storage temperature	-10...60 °C
Humidity	5...95% relative air humidity

mechanical characteristics

Calibrator housing	Polyamide 12
Weight	approx. 4 kg
Pressure port	Serto and various adapters
Pprotection Level	IP 65
Hydraulic oil	Type HLP 22 BP

Delivery

Calibrator (including oil filling)	
Carrying case	
Spare battery, type CR2430 (3,0 V)	
Test object adapter G1/4"-G3/8"	
Test object adapter G1/4"-1/2"-20UNF-2BG3/8"	
Test object adapter G1/4"-G1/2"	
Allen key(s)	
USB interface converter, K-114A	
Software CD (Keller)	
Testprotocoll (5 points)	
Operating instructions	