

East Hills Magnum Pro Pneumatic Calibration Hand Pump MVP-600



- Finest pressure adjustment
- Vacuum to 40 bar (600 psi)
- Rugged and light weight
- Good metering up and down
- Handy in use
- 2 year warranty

Маднит CALBRATION PUMPS

Produces pneumatic pressure and vacuum to check calibration of gauges, switches, transmitters, and recorders. The contoured cushioned handles provide extra comfort while preventing the pump from sliding. The over-sized check valve provides smooth operation throughout the output range while the dual o-rings on all pistons ensure zero leakage. Patented Mash proof vent valve comes standard on all MVP-600s (No Needle Valve) and a non-oil based lubricant is used on all moving parts.

By DAkkS according to DIN EN ISO / IEC 17025: 2005 accredited laboratory. The accreditation is valid only for the certificate system D-K-15055-01-00 listed accreditation scope.




Description

- Range: 28" to 40 bar
- compatible with all gauges and calibrators
- Connections (2 ports) ¼" and 1/8" NPZ/BSP
- Weight: 0,907 kg (2lb
- Dual O-Rings on all pistons to ensure zero leakage

Model	Describtion
MVP-600	Pump only
MVP-600KT	includes Pump, a black padded canvas case embroidered with orange thread, 2ft non-stretch hose, fittings, additional rubber bonded washers and (2) adaptors.*
MVP-600KT+	includes everything in the MVP-600KT plus the COLT F-15 fitting*
MVP-600WIN	includes everything in the MVP-600KT plus Winchester Engineering Model 1 Auto Ranging Digital Gauge™ w/ N.I.S.T. certification and versatile hook.*
MVP-600WIN-FIT	includes everything in the MVP-600WIN plus FasTest universal quick connect kit and coupler for Swagelok tube fittings.*
MVP-600RK	Rebuild Kit for MVP-600 (includes: Bonded Washers, O-Rings, a Schrader Valve, a X-Ring, a Pressure Valve Spring, a Vacuum Valve Spring, a Ring Retain Clip, a Plug Shorty, Non-petroleum lubricant

*Note: Kits, hoses, and fittings can be customized upon request.

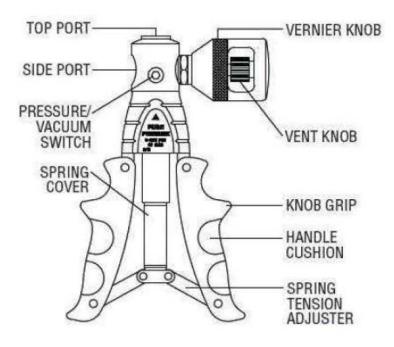

Fax: + 49 (0) 6181 / 42 30 9 22